

(12) UK Patent Application (19) GB (11) 2 340 438 (13) A

(43) Date of A Publication 23.02.2000

(21) Application No 9916384.9

(22) Date of Filing 21.07.1999

(30) Priority Data

(31) 09133728 (32) 13.08.1998 (33) US

(71) Applicant(s)

Milwaukee Electric Tool Corporation
(Incorporated in USA - Delaware)
13135 West Lisbon Road, Brookfield,
Wisconsin 53005, United States of America

(72) Inventor(s)

Thomas Richard Bednar
Michael Scott Steele
Roger Dean Neitzell

(74) Agent and/or Address for Service

Marks & Clerk
Sussex House, 83-85 Mosley Street, MANCHESTER,
M2 3LG, United Kingdom

(51) INT CL⁷

B23D 49/16

(52) UK CL (Edition R)

B5L LDS L104

(56) Documents Cited

US 5566458 A US 4628605 A


(58) Field of Search



UK CL (Edition Q) B5L LDS LDX L104
INT CL⁶ B23D 49/16, B27B 19/02 19/04
Online: WPI, EPODOC, JAPIO

(54) Abstract Title

Orbital reciprocating saw

(57) An orbital reciprocating saw 10 comprises a housing 14, a motor 30 supported by the housing 14 and including a rotatable drive shaft 42, a spindle 50 rotatably supported within the housing 14 having one end (Figure 2, 54) adapted to support a saw blade 58, a wobble plate (Figure 2, 78) mounted on the drive shaft 42 arranged to reciprocally drive the spindle 50 on rotation of the drive shaft 42, an orbital drive assembly comprising a cam member, supported on the drive shaft 42, engageable with the spindle 50 and having an eccentric outer surface with respect to the drive shaft 42 and an orbital adjustment assembly connected to the drive assembly. The orbital adjustment assembly may comprise a cylindrical member with an axis parallel to that of the drive shaft 42. The wobble plate may include a drive arm, one end of which is received in a bore defined by the spindle 50, the spindle 50 including a wear compensating member positioned inside the bore and engageable with the end of the drive arm. The saw may also include a shoe for engaging with a surface of the workpiece, the shoe having a support member comprising a plurality of teeth and a locking member to fix the position of the shoe relative to the housing.

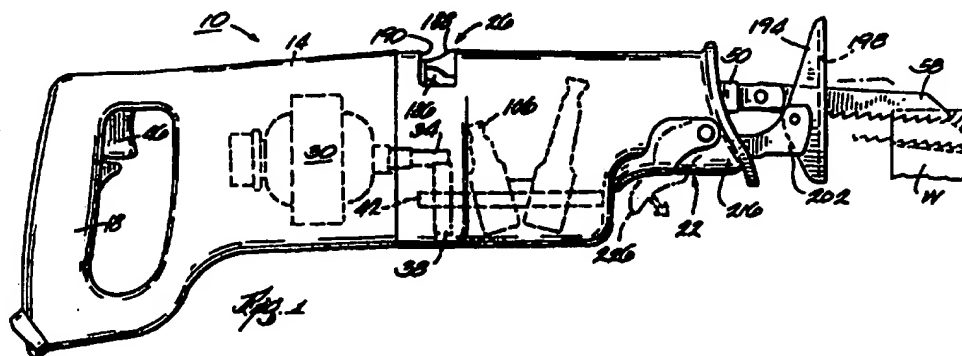

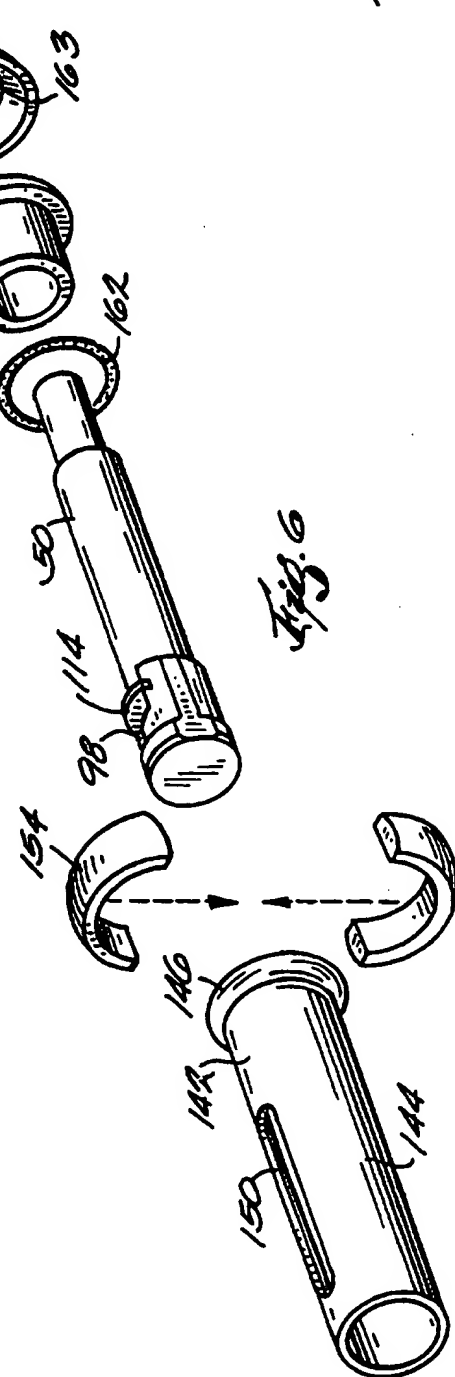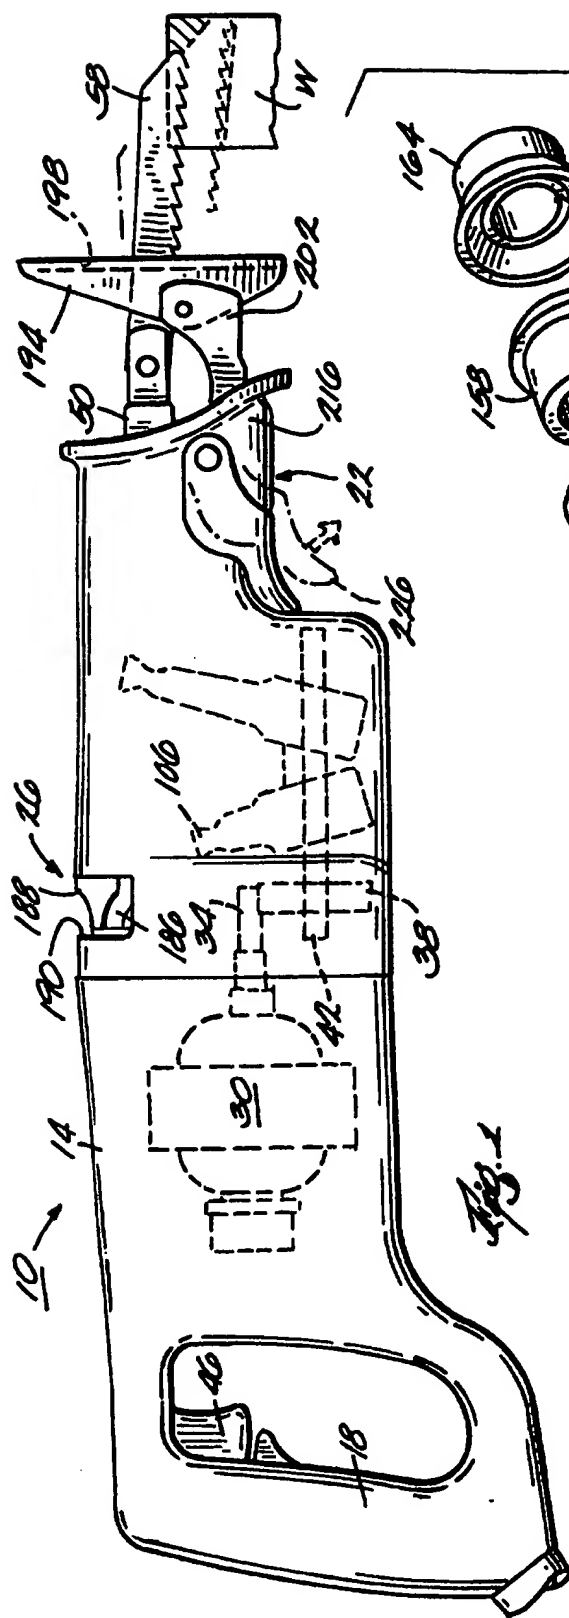

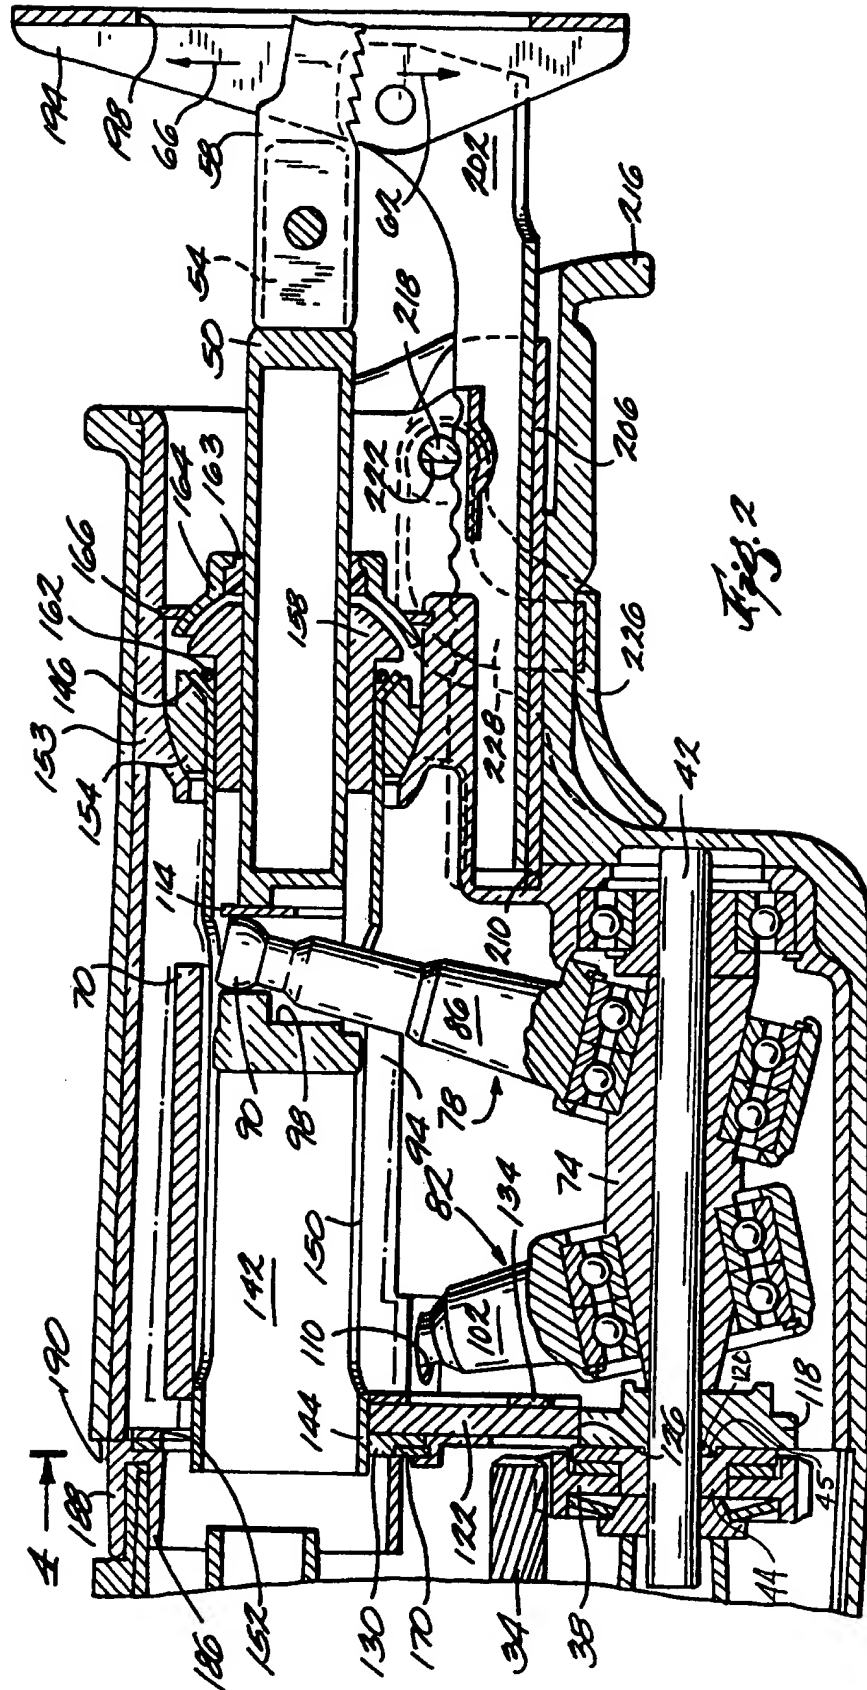
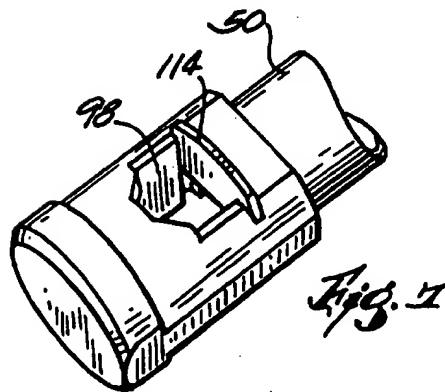
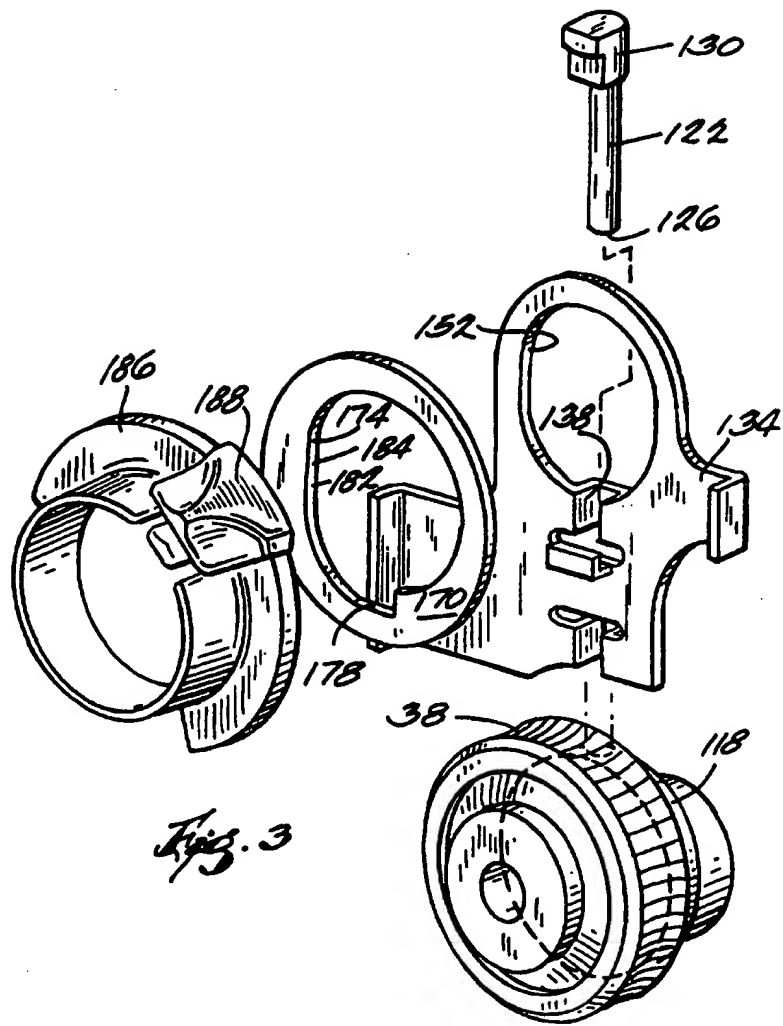
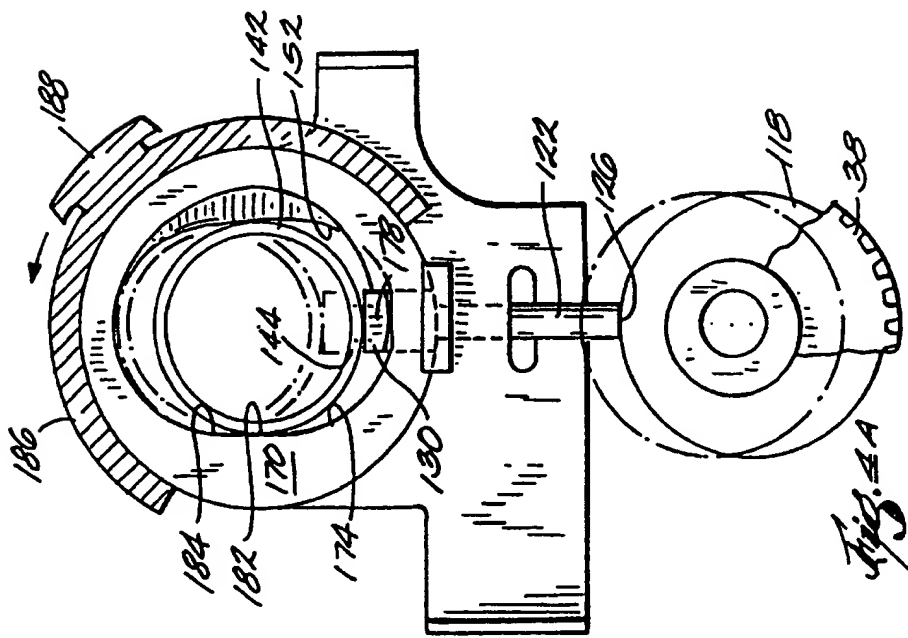
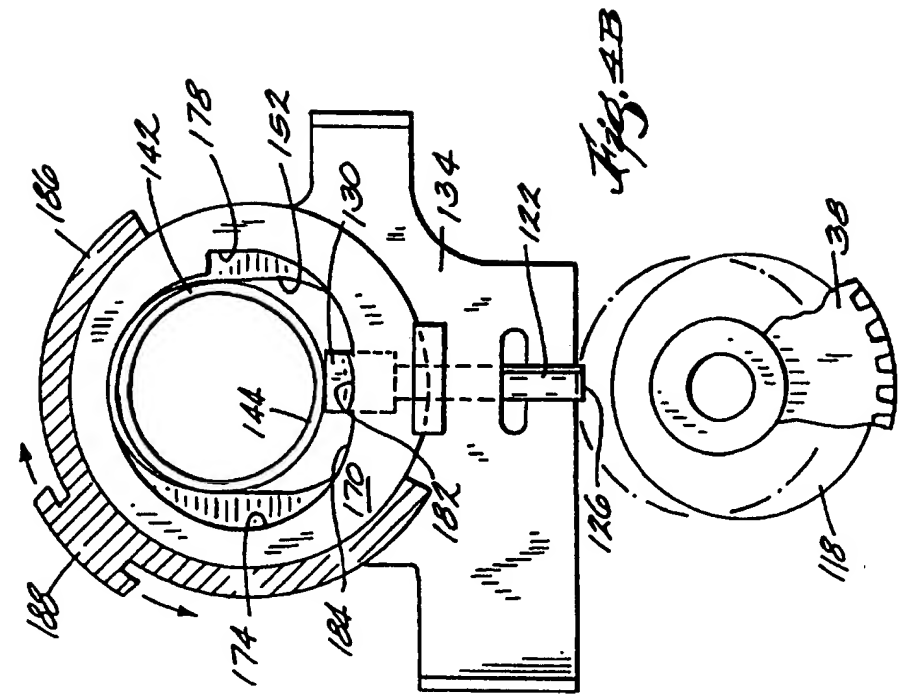


Fig. 2

A →





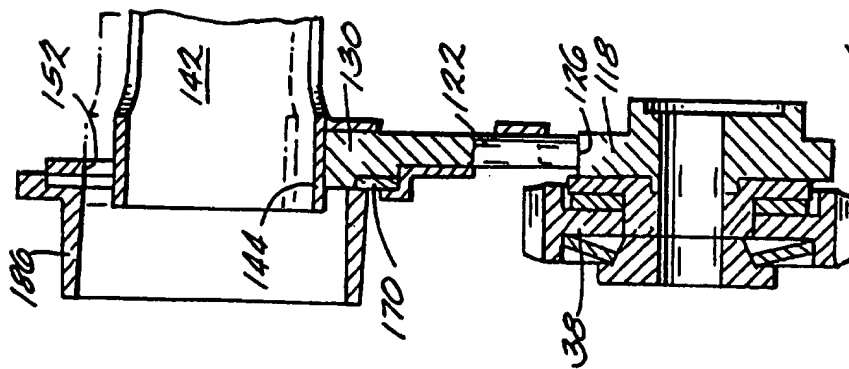


Fig. 5



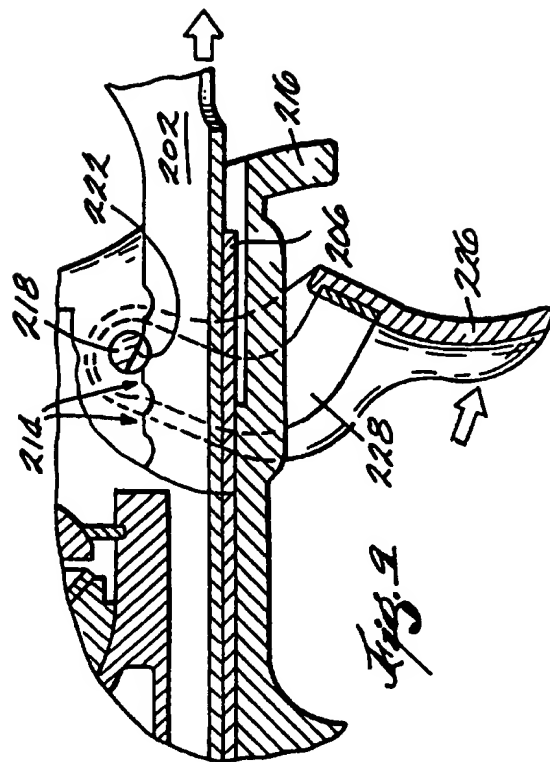


Fig. 9

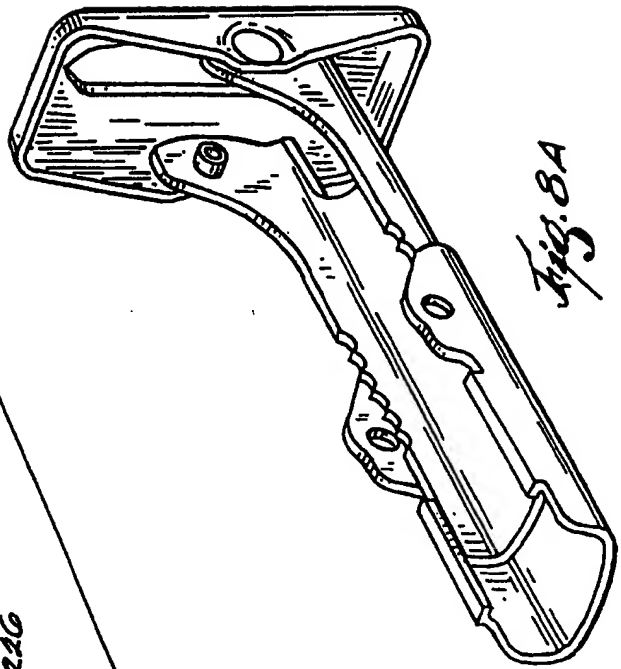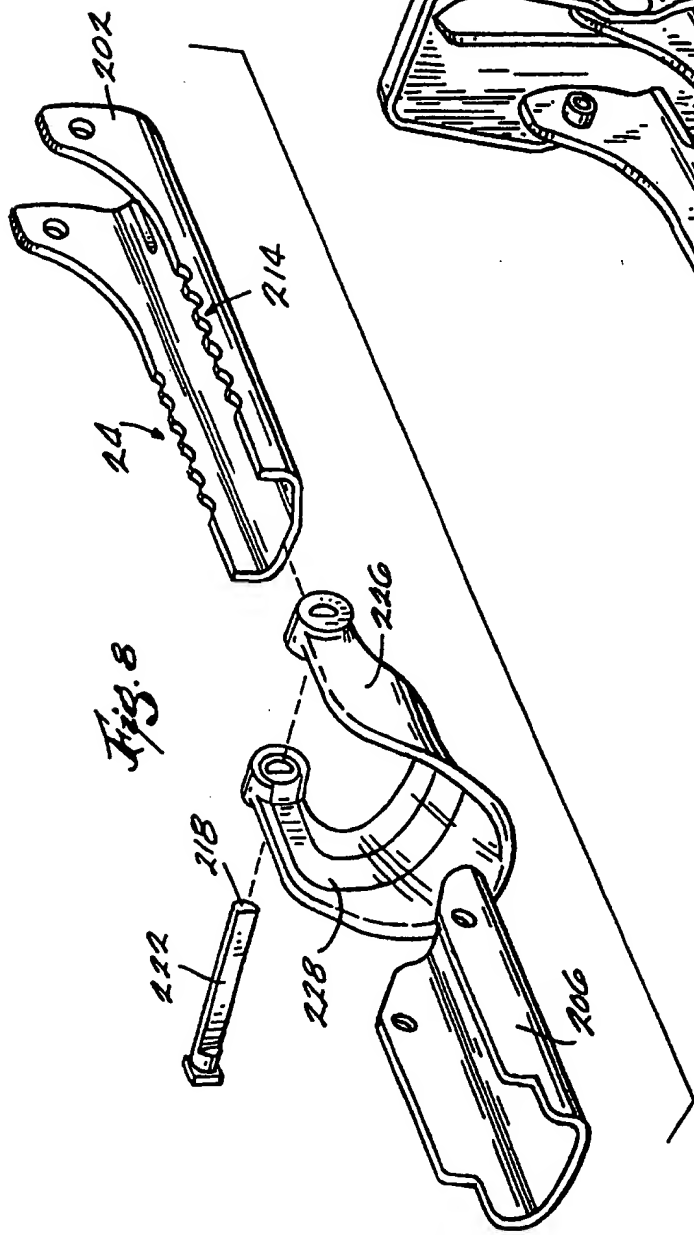

ORBITAL RECIPROCATING SAW

BACKGROUND OF THE INVENTION

5 The present invention generally relates to reciprocating saws.

 Reciprocating saws are used to cut a variety of objects made from a variety of materials, such as metal pipes, wood and dry wall. Such saws generally include a housing and a spindle mounted in the housing for
10 reciprocating motion along an axis that is parallel to the longitudinal extent of the spindle. An electric motor provides power to the spindle through a mechanical reciprocating device that converts the rotary motion of a motor shaft to reciprocating motion.
15 Such mechanical reciprocating devices can, for example, include an eccentric drive, as disclosed in U.S. Patent No. 5,079,844, or a wobble plate drive, as disclosed in U.S. Patent Nos. 5,025,562 and 5,050,307. In a typical wobble plate drive, the drive arm of a primary wobble
20 plate has a spherical tip that engages a suitable bore defined in the reciprocating spindle. The drive can also include a secondary wobble plate having a drive arm with a spherical tip engaging a bore defined in a reciprocating counterweight.

25 In some reciprocating saws, the spindle reciprocates in an orbital motion, as opposed to a straight line reciprocating motion. The orbital motion is commonly characterized by a forward (i.e., in the cutting direction) motion of the saw blade as the saw
30 blade is being retracted toward the saw on the cutting stroke, and a corresponding rearward (i.e., opposite the cutting direction) motion of the saw blade as the saw blade is being extended away from the saw on the return stroke. The result is a circuitous, or orbital,
35 path of the saw blade. Such orbital motion is believed to improve the speed at which the saw cuts a workpiece by driving the saw blade into the workpiece during the cutting stroke and withdrawing the saw blade from the workpiece during the return stroke.

Orbital motion has been achieved in a number of different ways. For example, in U.S. Patent Nos. 4,238,884 and 4,628,605, a forward force (in the cutting direction) is applied by a blade roller
5 directly to the saw blade during the cutting stroke, and forward motion of the saw blade is accommodated by a forgiving interconnection between the spindle and the drive mechanism. In U.S. Patent No. 5,212,887, the spindle reciprocates through a pivotally-mounted
10 bushing, and the back end of the spindle is connected to an eccentric member that provides forward-rearward motion to the spindle. In U.S. Patent Nos. 4,962,588 and 4,550,501, the back end of the spindle is moved forward-rearward by connection to a cam surface on a
15 rotating gear. In U.S. Patent No. 5,392,519 the back end of the spindle is moved forward-rearward by connection to an eccentric member formed on the drive gear.

In some orbital reciprocating saws, the orbital
20 motion of the saw blade can be adjusted or disengaged. For example, U.S. Patent No. 4,550,501 discloses a cam lever located on the side of the saw and operable to adjust the orbital motion of the saw blade. The cam lever is adjusted between a first position, in which
25 the spindle is connected to the cam surface on the rotating gear, and a second position, in which the spindle is disconnected from a portion of the cam surface on the rotating gear.

To accommodate the orbital motion of the spindle,
30 an orbital reciprocating saw typically includes a bearing arrangement for supporting the spindle. For example, U.S. Patent No. 4,550,501 discloses a bearing block and a slidable bearing insert received within the bearing block. The bearing insert and the bearing
35 block are dimensioned to provide a clearance space in the vertical direction to permit limited relative movement between the bearing insert and the bearing block to accommodate the orbital motion. A separate

dust seal is mounted forwardly of the bearing assembly to prevent debris and other contamination from entering the saw housing.

5 In U.S. Patent No. 5,212,887, an annular bearing member slidably receives the spindle or plunger assembly of the reciprocating saw. The bearing is received within an annular support mounted on the tool casing. The bearing and the bracket define spaces for receiving O-rings and clearance spaces. The O-rings
10 and the clearance spaces cooperate to provide a swivel or swinging mounting for the plunger assembly to permit oscillatory movement of the plunger assembly. In other bearing arrangements, a spherical bearing may be provided, such as that shown in U.S. Patent No.
15 3,945,120.

Some reciprocating saws further include a shoe secured relative to the housing to provide a flat surface for resting against the workpiece during cutting operations. The shoe is positioned near the
20 saw blade, and the flat surface is usually perpendicular to the saw blade. The shoe typically includes an opening through which the blade extends.

In some reciprocating saws, the shoe may be adjustable relative to the length of the saw blade so
25 that the shoe may be located in an optimum position for cutting operations. U.S. Patent No. 5,421,091 discloses an adjustable guideshoe for a reciprocating saw. The adjustable guideshoe is mounted on a support bar which is received within an elongated slot formed
30 in the nose section of the saw housing. The support bar includes a plurality of sets of opposed cam faces which are provided in side-by-side pairs spaced longitudinally along the bar. A manually operated plunger is mounted in the nose section and is spring
35 biased toward the support bar. The plunger bar includes cam surfaces adapted for complementary wedging engagement with selected sets of cam faces on the

support bar to achieve a self-locating function for the support and guideshoe mounted thereon.

SUMMARY OF THE INVENTION

5 The reciprocating saws described above have several problems.

 For example, in a reciprocating saw with a wobble plate drive, the wobble plate drive arm and the spindle bore are machined with tight tolerances to extend the
10 life of the saw and also to maintain acceptable noise levels. The required machining increases the cost of manufacturing the saw. Also, as the joint between the wobble plate drive arm and the spindle bore wears, the
15 tight tolerance of the joint is lost so that wear of the saw increases. The loose joint between the drive arm and the spindle bore also causes increased noise.

 One problem with a reciprocating saw having an orbital drive system in which cam member is fixed to the drive shaft is that the cam member is not
20 replaceable or interchangeable without changing the attached drive shaft and/or drive gear. The lack of replaceability is a problem because the cam member is subject to wear due to the pressure applied during orbital cutting operations (i.e., when the saw blade is
25 plunged into the workpiece). The lack of interchangeability is a problem because another cam member having a different cam configuration may provide a preferred orbital path for the saw blade for a given cutting operation.

30 One problem with the adjustment of an orbital reciprocating saw is that previous orbital actuation levers are typically located on one side of the tool. As a result, the operator can only activate the lever from that side of the saw.

35 One problem with the bearing assemblies that accommodate orbital motion in a reciprocating saw is that the bearing assemblies are difficult to assemble and increase the cost of manufacturing the saw.

Another problem with some of these bearing assemblies is that they do not provide a good seal to prevent contaminants and debris from entering the saw housing.

5 One problem with some adjustable shoe assemblies for reciprocating saws is that these assemblies do not provide fine increments of adjustment to allow the shoe to be placed in the optimal position. Another problem with some of these adjustable shoe assemblies is that they require additional tools, such as a wrench or a
10 key, for adjustment. Yet another problem with some of these shoe adjustment assemblies is that the adjustment mechanism or lever is accessible from only one side of the saw so that the operator can use only one hand to actuate the adjustment lever. A further problem with
15 some of these shoe adjustment assemblies is that, while the lever is biased towards a locked position, the lever may be inadvertently operated by grasping the front portion of the housing, allowing the shoe to move relative to the housing during cutting operations.

20 The present invention provides a reciprocating saw that attempts to alleviate the problems relating to existing reciprocating saws. In one aspect, the invention provides a reciprocating saw that drives a saw blade in an adjustable orbital path. The saw
25 comprises a housing, a motor supported by the housing and including a drive shaft, a spindle movably supported within the housing and having a front end adapted to support the saw blade through a cutting stroke and a return stroke, a wobble plate mounted on
30 the drive shaft and connected to the spindle to reciprocally drive the spindle relative to the housing upon rotation of the drive shaft, an orbital drive assembly connected to the spindle and operable to selectively drive the saw blade in an orbital path, and
35 an orbital adjustment assembly connected to the orbital drive assembly and operable to adjust the orbital path of the saw blade.

Preferably, the orbital drive assembly includes a cam member removably supported on the drive shaft. The cam member has an outer surface that is eccentric relative to the drive shaft axis. The cam member is engageable with the spindle to cause orbital movement of the saw blade upon rotation of the drive shaft.

The orbital drive assembly may further include a support member pivotably supported by the housing. The spindle is supported within the support member for reciprocal movement relative to the support member along the support member axis. The orbital drive assembly may further include a cam follower selectively engageable with the outer surface of the cam member and engageable with the support member. During rotation of the drive shaft, engagement of the cam follower with the cam member causes pivoting movement of the support member and orbital movement of the saw blade.

Preferably, the reciprocating saw further comprises a limiting portion engageable with the support member to limit pivoting movement of the support member in a direction perpendicular to the support member axis. Also, the orbital drive assembly preferably further includes a cam follower support member supported by the housing and providing the limiting portion.

The orbital adjustment assembly may be operable to selectively disengage the cam follower from the cam member during at least a portion of the rotation of the cam member to change the orbital path of the saw blade. The orbital adjustment assembly may include an orbital adjustment member supported by the housing for movement between a first position, in which a portion of the orbital adjustment member engages a portion of the cam follower during the portion of the rotation of the cam member to disengage the cam follower from the cam member, and a second position. Preferably, the orbital adjustment member has a cylindrical outer surface defining an axis of rotation, and the orbital

adjustment member is rotatable about the axis between the first position and the second position.

5 The orbital adjustment assembly may further include a lever for moving the orbital adjustment member between the first and second positions, and the lever is preferably positioned so that it is engageable through the upper portion of the housing. In this manner, the orbital adjustment member is adjustable from either side of the tool by an operator.

10 The saw may further comprise a spherical bearing assembly supported by the housing. The spherical bearing assembly slidably supports the spindle for movement relative to the housing and supports the forward portion of the support member so that the
15 support member and the spindle are pivotable relative to the housing. Preferably, the spherical bearing assembly includes a spherical sleeve supported between the housing and the support member and a bearing member supported between the support member and the spindle.

20 In another aspect, the invention provides a reciprocating saw having an adjustable shoe assembly. The shoe assembly includes a shoe for engaging a surface of the workpiece and a shoe support member supporting the shoe. The shoe support member is
25 movably supported by the saw housing and defines a plurality of teeth along its length.

 The shoe assembly also includes a locking member pivotally supported by the saw housing. The locking member defines a slot. The shoe assembly also includes
30 a lever for pivoting the locking member between a locked position, in which the teeth are prevented from moving in the slot defined by the locking member so that the shoe support member is prevented from moving relative to the housing, and a release position, in
35 which the teeth are movable in the slot so that the shoe support member is movable relative to the housing.

Preferably, the lever is operable from the lower portion of the saw housing so that it can be engaged by either hand of the operator. Also, during cutting operations, the operator preferably engages the lever so that the locking member is maintained in the locked position.

In yet another aspect, the invention provides a drive assembly for a reciprocating saw. The drive assembly comprises a spindle movably supported within the saw housing and defining a bore, a wobble plate mounted on the motor drive shaft and connected to the spindle to reciprocally drive the spindle relative to the saw housing upon rotation of the drive shaft, the wobble plate including a drive arm having an end receivable in the bore, and a wear compensating member positioned in the bore and engageable with the end of the drive arm. The drive assembly thus provides a wear compensating socket between the spindle and the drive arm of the wobble plate. Preferably, the wear compensating member is a spring.

One advantage of the present invention is that, because a wear compensating socket is provided in the spindle, the tolerance of the joint between the drive arm of the wobble plate and the spindle bore does not have to be as tightly machined. This reduces the cost of manufacturing the saw. Additionally, the wear compensating socket adjusts for wear between the drive arm and the spindle bore extending the life of the saw and reducing the noise level of the saw.

Another advantage of the present invention is that because the cam member is separate from the drive shaft, the cam member can be easily replaced or interchanged. This provides easy replacement of a worn cam member or interchangeability with different cam members to change the pattern of the orbital blade movement to affect the cutting performance of the reciprocating saw.

Yet another advantage of the present invention is that because the orbital actuation assembly is positioned at the top and center of the tool, the actuation assembly is operable with either hand.

5 Further, the orbital actuation assembly maintains its center at the spindle axis allowing the orbital actuation lever to seal the opening through which the lever extends from the housing. In addition, because the orbital adjustment member or lock-out plate lifts

10 the cam follower off of the cam member, the cam follower is prevented from rattling during reduced-orbit or no-orbit cutting operations. Also, the orbital actuation assembly provides multiple positions so that the amount of orbit in the path of the saw

15 blade can be adjusted for different cutting operations.

A further advantage of the present invention is that the spherical bearing assembly allows the spindle to pivot freely during orbital cutting operations. Also, the bearing assembly provides a good seal that

20 moves with the spindle to prevent dust and contamination from entering the housing. Additionally, the bearing assembly allows easy assembly of the reciprocating saw.

Another advantage of the present invention is that

25 the adjustable shoe assembly allows finer increments of adjustment of the shoe relative to the housing. Also, the adjustable shoe assembly does not require additional tools for adjustment of the shoe. Further, the lever is operable from either side of the tool with

30 one hand. In addition, during cutting operations, the lever is held by the operator in the locked position to reduce the chance of inadvertent unlocking of the shoe.

Other features of the invention will become apparent to those skilled in the art upon review of the

35 following detailed description, claims and drawings.

DESCRIPTION OF THE DRAWINGS

Fig. 1 is a side view of a reciprocating saw embodying the invention.

5 Fig. 2 is a partial cross-sectional side view of the reciprocating shown in Fig. 1.

Fig. 3 is an exploded perspective view of the orbital adjustment assembly of the reciprocating saw shown in Fig. 1.

10 Fig. 4A is a partial cross-sectional view generally taken along line 4--4 in Fig. 2 and illustrating the orbital drive assembly and the orbital adjustment assembly in a full-orbit position.

15 Fig. 4B is a view similar to that in Fig. 4A and illustrating the orbital drive assembly and the orbital adjustment assembly in a reduced-orbit position.

Fig. 5 is a partial cross-sectional side view of the orbital drive assembly and the orbital adjustment assembly.

20 Fig. 6 is an exploded perspective view of the spindle, support member and bearing assembly of the reciprocating saw shown in Fig. 1.

Fig. 7 is a perspective view of a portion of the spindle shown in Fig. 6.

25 Fig. 8 is an exploded perspective view of the adjustable shoe assembly of the reciprocating saw shown in Fig. 1.

Fig. 8A is a perspective view of an alternative embodiment of a portion of the adjustable shoe assembly shown in Fig. 8.

30 Fig. 9 is a partial cross-sectional side view of the adjustable shoe assembly shown in Fig. 8 and illustrating the locking member in an unlocked position.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A reciprocating saw 10 embodying the present invention is illustrated in Fig. 1. The reciprocating saw 10 generally includes a main housing 14 having an operator's handle 18, a forward portion 22 opposite the handle portion 18, and an upper portion 26.

An electric motor 30 is supported by the housing 14. The motor 30 includes a drive pinion 34 that engages a gear 38 mounted on a drive shaft 42. The drive shaft 42 is rotatably mounted within the housing 14. A drive hub 44 is mounted on the drive shaft 42 and is connected to the gear 38. The hub 44 defines an off-center pocket 45. A switch 46 is located in the operator's handle 18 for energizing the motor 30 to rotate the drive shaft 42.

A spindle 50 (partially shown) is supported by the housing for reciprocating and pivoting movement (e.g., orbital movement) relative to the housing 14. As shown in Fig. 2, the spindle 50 includes a front end 54 that supports a saw blade 58, which is designed to cut in a cutting direction 62 (i.e., in the direction of the saw teeth) opposite a non-cutting direction 66. The spindle 50 generally reciprocates the saw blade 58 through a cutting stroke (usually toward the housing 14) and a return stroke (usually away from the housing 14).

A counterweight 70 is supported by the housing 14 for reciprocating and pivoting movement (e.g., orbital movement) relative to the housing 14. The counterweight 70 provides a vibration-reducing force that at least partially counteracts the forces created by movement of the spindle 50 and the saw blade 58.

The reciprocating saw 10 also includes (see Fig. 2) a reciprocating drive assembly for driving the spindle 50 and the counterweight 70. In the illustrated construction, the reciprocating drive assembly includes a wobble plate drive assembly having a wobble shaft 74 positioned over the drive shaft 42,

and primary and secondary wobble plates 78 and 82 that are driven by the wobble shaft 74 in a conventional manner. The primary wobble plate 78 includes a primary drive arm 86 having a ball end 90. The drive arm 86 extends through a slot 94 in the counterweight 70 so that the end 90 extends into a bore 98 defined in the spindle 50 to form a spindle socket. In this manner, the primary wobble plate 78 drivingly engages the spindle 50 for reciprocating movement.

The secondary wobble plate 82 includes a drive arm 102 having a ball end 106 (see Fig. 1) that extends into a bore 110 (see Fig. 2) defined in the counterweight 70 to form a counterweight socket. In this manner, the secondary wobble plate 82 drivingly engages the counterweight 70 for reciprocating movement.

As shown in Figs. 2, 6, and 7, the illustrated spindle 50 includes a wear compensating member in the form of a spring 114 positioned in the forward portion of the bore 98. As shown in Fig. 2, the end 90 of the primary wobble plate 78 engages the spring 114 so that a relatively tight fit is formed in the spindle socket between the end 90 and the bore 98. This tight fit reduces wear on the spindle 50 and primary wobble plate 78 and also reduces noise caused by a loose fit between these components. Additionally, over the life of the reciprocating saw 10, the spring 114 compensates for any wear in the spindle socket between the spindle 50 and the primary wobble plate 78 to maintain a tight fit. In other constructions (not shown), a spring could similarly be used in the counterweight socket between the end 106 of the secondary wobble plate 82 and the bore 110 of the counterweight 70.

The reciprocating saw 10 also includes (see Figs. 2-5) an orbital drive assembly for driving the spindle 50 in an orbital motion (e.g., reciprocating and pivoting motion). The orbital motion is characterized by a forward (i.e., in the cutting direction 62) motion

of the saw blade 58 as the saw blade 58 is being retracted toward the saw housing 14 on the cutting stroke, and a corresponding rearward (i.e., in the non-cutting direction 66) motion of the saw blade 58 as the saw blade 58 is being extended away from the housing 14 on the return stroke. This results in a circuitous or orbital path of the saw blade 58.

The orbital drive assembly includes cam member 118 supported on the drive shaft 42 for rotation with the drive shaft 42. The cam member 118 has an outer surface that is eccentric with respect to the axis of the drive shaft 42 so that the outer surface of the cam member 118 rotates eccentrically about the axis of the drive shaft 42 as the drive shaft 42 rotates.

As shown in Fig. 2, a projection 120 on the cam member 118 engages in the pocket 45 on the hub 44 so that the cam member 118 does not rotate relative to the drive shaft 42 or relative to the gear 38. However, the cam member 118 is removable from the drive shaft 42 by sliding the cam member 118 off an end of the drive shaft 42. In this manner, the cam member 118 can be replaced if the cam member 118 becomes worn.

Similarly, the cam member 118 can be interchanged with another cam member (not shown) having a different eccentric or cam configuration on its outer surface.

The orbital drive assembly also includes (see Figs. 2-5) a cam follower 122. The cam follower 122 includes a lower portion 126 that is selectively engageable with the outer surface of the cam member 118. The cam follower 122 also includes head portion 130.

The cam follower 122 is supported (see Fig. 3) by a pin support member 134 secured to the housing 14. Specifically, the cam follower 122 is positioned within a pin support channel 138 defined by the support member 134. The cam follower 122 is supported by the support member 134 so that the cam follower 122 is movable relative to the support member 134 along the

longitudinal axis of the cam follower 122. The channel 138 substantially prevents the cam follower 122 from rotating or moving laterally relative to the longitudinal axis of the cam follower 122. When the lower portion 126 of the cam follower 122 is engaged with the rotating cam member 118, the cam follower 122 reciprocates along the longitudinal axis of the cam follower 122.

The orbital drive assembly also includes (see Figs. 2 and 4-5) a tube chassis 142 that is supported in the housing 14 for pivotal movement relative to the housing 14. The tube chassis 142 is generally cylindrical and has a hollow inner portion for receiving the spindle 50. The spindle 50 is supported by the tube chassis 142 for reciprocating movement along the longitudinal axis of the tube chassis 142. The tube chassis 142 has a rear portion 144 and a forward flanged portion 146 and defines (see Figs. 2 and 6) a slot 150 through which the drive arm 86 of the primary wobble plate 78 extends to engage the spindle 50. The counterweight 70 is supported on the outer surface of the tube chassis 142 for reciprocating movement relative to the tube chassis 142.

In the illustrated construction, the head portion 130 of the cam follower 122 engages the rear portion 144 of the tube chassis 142. When the cam follower 122 reciprocates, the tube chassis 142 pivots relative to the housing 14 about the forward flanged portion 146 (see Fig. 2) of the tube chassis 142. Because the tube chassis 142 is positioned between the spindle 50 and the counterweight 70, the spindle 50 and the counterweight 70 pivot with the tube chassis 142. The pivoting movement of the tube chassis 142 and the spindle 50 in combination with the reciprocation of the spindle 50 causes the saw blade 58 to move in an orbital path.

As shown in Figs. 2 and 4-5, the tube chassis 142 extends through a central opening 152 formed in the support member 134. The support member 134 limits the lateral movement of the tube chassis 142. In other constructions (not shown), a limiting portion may be provided by bosses or guides formed on the inner portion of the housing 14 to limit the lateral movement of the tube chassis 142.

The reciprocating saw 10 also includes (see Figs. 2 and 6) a spherical bearing assembly to accommodate the pivotal movement of the spindle 50 and the tube chassis 142 relative to the housing 14. The spherical bearing assembly also seals an inner, forward portion 153 of the housing 14 to prevent debris from entering the housing 14 and adversely affecting the operation of the reciprocating saw 10.

The spherical bearing assembly includes a split spherical sleeve 154 captured between the forward flanged portion 146 of the tube chassis 142 and the inner, forward portion 153 of the housing 14. The spherical sleeve 154 has a spherical outer surface to accommodate pivoting movement of the tube chassis 142 relative to the housing 14.

The spherical bearing assembly also includes a spherical bearing member 158 positioned between the inner surface of the tube chassis 142 and the outer surface of the spindle 50. The bearing member 158 accommodates reciprocation of the spindle 50 relative to the tube chassis 142. The bearing member 158 also limits the forward movement of the spindle 50 relative to the tube chassis 142 so that the spindle 50 is retained within the tube chassis 142. An O-ring 162 (see Fig. 2) is positioned between the bearing member 158 and the inner surface of the forward flanged portion 146 of the tube chassis 142.

The spherical bearing assembly also includes a forward seal 163 sealingly engaging the spherical bearing member 158 and the spindle 50. A seal retainer

plate 164 covers the seal 163 and a portion of the spherical bearing member 158. The seal retainer plate 164 has a spherical outer surface.

5 The spherical bearing assembly also includes a retaining member 166 engaging the housing 14 and the seal retainer plate 164 to retain the spherical bearing assembly, the tube chassis 142 and the spindle 50 within the housing 14. The spherical surface of the seal retainer plate 164 engages the inner surface of
10 the retaining member 166 to accommodate pivoting movement of the spindle 50 relative to the retaining member 166 and relative to the housing 14.

The spherical bearing assembly improves the ease of manufacture and assembly of the reciprocating saw
15 10. To assemble this portion of the reciprocating saw 10, the bearing member 158 and the O-ring 162 are slid rearwardly into the tube chassis 142. The spindle 50 is slid forwardly through the tube chassis 142 and through the bearing member 158. The tube chassis 142
20 is then positioned in the housing 14 and slid through the inner, forward portion 153 of the housing 14.

The forward seal 163 and the seal retainer plate 164 are slid rearwardly onto the spindle 50 into engagement with the forward portion of the bearing
25 member 158. The split spherical sleeve 154 is positioned around the forward flanged portion 146 of the tube chassis 142, and the tube chassis 142 is slid rearwardly to capture the spherical sleeve 154. Finally, the retaining member 166 is locked into
30 position against the seal retainer plate 164 to retain and seal the spherical bearing assembly, the tube chassis 142, and the spindle 50 within the housing 14.

In other constructions (not shown), the spherical bearing assembly may include a whole ring spherical
35 sleeve rather than the split spherical sleeve 154. In such a construction, the whole ring spherical sleeve is positioned on the tube chassis 142, and the tube

chassis 142 is slid rearwardly through the inner, forward portion 153 of the housing 14.

5 The reciprocating saw 10 also includes (see Figs. 2-5) an orbital adjustment assembly for adjusting the orbital path of the saw blade 58. In the illustrated construction, the orbital path of the saw blade 58 is adjusted by controlling or limiting the pivoting movement of the tube chassis 142 and the spindle 50.

10 The orbital adjustment assembly includes an orbital adjustment member 170 supported by the housing 14 and the support member 134 for rotational movement about the rear portion 144 of the tube chassis 142. The adjustment member 170 has a generally cylindrical outer surface defining the rotational axis of the
15 adjustment member 170. The support member 134 limits the downward movement of the adjustment member 170 and resists the downward force applied to the adjustment member 170 during cutting operations.

20 The adjustment member 170 includes (see Figs. 3-4) a cam surface 174 having first, second and third cam portions 178, 182, and 184. The adjustment member 170 is positioned adjacent to the cam follower 122 so that portions of the cam surface 174 are selectively engageable with the head portion 130 of the cam
25 follower 122.

The orbital adjustment assembly also includes (see Figs. 1-5) an orbital release member 186 for rotating the adjustment member 170 relative to the cam follower 122. Specifically, the release member 186 is secured
30 to the adjustment member 170 and is supported within the housing 14 for rotation about the axis of the adjustment member 170.

35 The release member or lever 186 includes (see Figs. 1-4) a manually-operable portion 188 which extends through an opening 190 (see Figs. 1-2) in the upper portion 26 of the housing 14 so that the manually-operable portion 188 can be engaged by the operator from either side of the housing 14. In this

manner, the operator can use either hand to adjust the rotational position of the release member 186 and adjustment member 170. As explained more fully below, the release member 186 is operable to move the
5 adjustment member 170 between a first or full-orbit position (shown in Fig. 4A), a second or reduced-orbit position (shown in Fig. 4B), and a third or no-orbit position.

The lever 186 also includes a first detent portion
10 (not shown) formed on the manually-operable portion 188. The first detent portion engages a second detent portion (not shown) formed on the housing 14 when the lever 186 is in the first, second, or third position to hold the lever 186 in that selected position.

15 The reciprocating saw 10 also includes (see Figs. 1, 2, 8, and 9) an adjustable shoe assembly including (see Figs. 1-2) a shoe plate 194 having a surface for engaging a surface of a workpiece W. The shoe plate 194 defines an aperture 198 through which the saw blade
20 58 is extendable. The aperture 198 is dimensioned to accommodate the orbital path of the saw blade 58.

The adjustable shoe assembly also includes (see Figs. 1, 2, 8, and 9) a shoe support member 202
25 pivotally connected to the shoe plate 194. The shoe support member 202 is movably supported by the housing 14 to adjust the position of the shoe plate 194 relative to the housing 14.

A shoe retaining plate 206 is supported in a slot
30 210 (see Fig. 2) defined in the housing 14 to form a channel in which the shoe support member 202 is movable. The retaining plate 206 supports the shoe support member 202 along at least two walls (i.e., the bottom wall and a side wall). In an alternative
35 embodiment (see Fig. 8A), the retaining plate 206 includes hardened wear surfaces provided by contact portions 212 to form a channel which supports the shoe support member 202 on all four sides.

The shoe support member 202 includes (see Figs. 2, 8, and 9) a plurality of pairs of teeth 214 spaced along the length of the shoe support member 202. One tooth 214 of each pair is formed on each lateral side of the shoe support member 202.

As shown in Figs. 1, 2 and 9, a rubber boot 216 covers and seals the forward portion of the housing 14 and the shoe retaining plate 206. The boot 216 also provides an improved gripping surface for the operator.

The adjustable shoe assembly also includes a locking member 218 pivotally supported by the housing 14. The locking member 218 is generally cylindrical but includes an axially-extending flat surface 222. A shoe release lever 226 is pivotally supported on the lower, forward portion 22 of the housing 14 and is connected to the locking member 218 so that pivotal movement of the lever 226 causes pivotal movement of the locking member 218. In this location, an operator can engage the lever 226 from either side of the housing 14 with either hand. A metal insert 228 is co-molded with the lever 226 to provide additional strength to the lever 226.

The lever 226 is movable between a first or locked position (shown in Fig. 2) and a second or released position (shown in Fig. 9). In the locked position (Fig. 2), the locking member 218 is pivoted so that the locking member 218 engages the teeth 214. The rounded portion of the locking member 218 engages the forward rounded surface of each of a pair of teeth 214, and the flat surface 222 engages the adjacent pair of teeth 214. In this manner, the shoe support member 202 is substantially prevented from moving relative to the housing 14.

To adjust the position of the shoe plate 194 relative to the housing 14, the operator moves the lever 226 to the release position (Fig. 9). As the lever 226 is pivoted to the release position, the locking member 218 is pivoted relative to the shoe

support member 202. In the release position (Fig. 9), the locking member 218 is pivoted so that the locking member 218 does not engage the teeth 214. The teeth 214 are movable beneath the flat surface 222 of the locking member 218. With the lever 226 maintained in the release position, the operator can adjust the shoe plate 194 relative to the housing 14 so that the shoe plate 194 is in an optimum position for cutting.

Once the shoe plate 194 is in the desired position, the lever 226 is pivoted to the locked position (Fig. 2), and the operator performs the cutting operation with the reciprocating saw 10. During cutting operations, the lever 226 is normally grasped by the operator in the locked position so that the locking member 218 will be maintained in this locked position.

The adjustable shoe assembly also includes a biasing member (not shown) to normally bias the lever 226 toward the locked position. The spring is preferably supported so that, as the lever 226 is moved to the release position, the spring moves over-center to bias the lever 226 toward the release position.

In operation of the reciprocating saw 10, the motor 30 is energized to rotate the drive shaft 42. The wobble shaft 74 rotates with the drive shaft 42 causing the primary wobble plate 78 to reciprocate the spindle 50 and causing the secondary wobble plate 82 to reciprocate the counterweight 70. The saw blade 58 reciprocates with the spindle 50.

Based on the operator's selection of the position of the adjustment member 170, the orbital drive assembly selectively causes orbital movement of the saw blade 58. In the full-orbit position (Fig. 4A), the cam follower 122 engages the outer surface of the cam member 118 throughout the rotation of the cam member 118. Engagement of the first cam portion 178 with the head portion 130 does not disengage the lower portion 126 of the cam follower 122 from the cam member 118.

As a result, as the cam member 118 rotates, the cam follower 122 reciprocates, causing the tube chassis 142 and the spindle 50 to pivot as the spindle 50 reciprocates. This combination of reciprocating movement and pivoting movement causes the saw blade 58 to move in a full-orbit path defined by the cam configuration of the cam member 118.

In the reduced-orbit position (Fig. 4B), the second cam portion 182 engages the head portion 130 to disengage the lower portion 126 of the cam follower 122 from the cam member 118 during at least a portion of the rotation of the cam member 118. As a result, the cam follower 122 does not reciprocate during this portion of the rotation of the cam member 118. The tube chassis 142 and the spindle 50 are also thus not pivoted during this portion of the rotation of the cam member 118, limiting the orbital movement of the saw blade 58 to a reduced-orbit path.

In the no-orbit position, the third cam portion 184 engages the head portion 130 to disengage the cam follower 122 from the cam member 118 during the complete rotation of the cam member 118. As a result, the cam follower 122 does not reciprocate as the cam member 118 rotates, and the tube chassis 142 and the spindle 50 do not pivot. Thus, the saw blade 58 reciprocates in a straight, no-orbit path.

In other constructions (not shown), the orbital adjustment assembly may be operable to disengage the tube chassis 142 from the cam follower 122 to limit the pivoting movement of the tube chassis 142 and the spindle 50 and to thereby limit the orbital path of the saw blade 58. In yet other constructions (not shown), the cam surface 174 of the adjustment member 170 may be configured so that the orbital adjustment assembly has only a full-orbit condition and a no-orbit condition. Alternatively, the cam surface 174 may be configured so that the orbital adjustment assembly is infinitely

adjustable between the full-orbit condition and the no-orbit condition.

5 The foregoing description of the present invention
has been presented for purposes of illustration and
description. Furthermore, the description is not
intended to limit the invention to the form disclosed
herein. Consequently, variations and modifications
commensurate with the above teachings, and the skill or
knowledge of the relative art, are within the scope of
10 the present invention. The embodiments described
herein are further intended to explain best modes known
for practicing the invention and to enable others
skilled in the art to utilize the invention in such, or
other, embodiments and with various modifications
15 required by the particular applications or uses of the
present invention. It is intended that the appended
claims be construed to include alternative embodiments
to the extent permitted by the prior art.

What is Claimed is:

1. A reciprocating saw comprising:
 - a housing;
 - 5 a motor supported by said housing, said motor including a drive shaft rotatable about a drive shaft axis;
 - a spindle movably supported within said housing, said spindle having a front end adapted to support a saw blade through a cutting stroke and a return stroke;
 - 10 a wobble plate mounted on said drive shaft and connected to said spindle to reciprocally drive said spindle relative to said housing upon rotation of said drive shaft;
 - 15 an orbital drive assembly connected to said spindle and operable to selectively drive the saw blade in an orbital path, said orbital drive assembly including a cam member supported on said drive shaft, said cam member having an eccentric outer surface relative to said drive shaft axis, said cam member being engageable with said spindle to cause orbital movement of the saw blade upon rotation of said drive shaft; and
 - 20
 - 25 an orbital adjustment assembly connected to said orbital drive assembly and operable to adjust the orbital path of the saw blade.

2. The reciprocating saw as set forth in Claim 1 wherein said orbital drive assembly further includes

a support member pivotably supported by said housing, said support member defining a support member axis, said spindle being supported within said support member for reciprocal movement relative to said support member along said support member axis; and

a cam follower selectively engageable with said outer surface of said cam member, said cam follower being engageable with said support member, and wherein, during rotation of said drive shaft, engagement of said cam follower with said cam member causes pivoting movement of said support member and orbital movement of the saw blade.

3. The reciprocating saw as set forth in Claim 2 and further comprising a limiting portion engageable with said support member to limit pivoting movement of said support member in a direction perpendicular to said support member axis.

4. The reciprocating saw as set forth in Claim 3 wherein said orbital drive assembly further includes a cam follower support member supported by said housing, said cam follower support member provides said limiting portion.

5. The reciprocating saw as set forth in Claim 2 wherein said orbital adjustment assembly is operable to selectively disengage said cam follower from said cam member during at least a portion of the rotation of said cam member to change the orbital path of the saw blade.

6. The reciprocating saw as set forth in Claim 5 wherein said orbital adjustment assembly includes an orbital adjustment member supported by said housing for movement between a first position, in which a portion
5 of said orbital adjustment member engages a portion of said cam follower during said at least a portion of the rotation of said cam member to disengage said cam follower from said cam member, and a second position.

10 7. The reciprocating saw as set forth in Claim 6 wherein said housing has an upper portion, a lower portion, and opposite side portions, and wherein said orbital adjustment assembly further includes a lever
15 for moving said orbital adjustment member between the first position and the second position, said lever being engageable through said upper portion of said housing.

20 8. The reciprocating saw as set forth in Claim 6 wherein said orbital adjustment member defines therein an opening having a cam surface, wherein, in said first position, a portion of said cam surface engages a
portion of said cam follower during said at least a portion of the rotation of said cam member to disengage
25 said cam follower from said cam member.

9. The reciprocating saw as set forth in Claim 8 wherein said orbital adjustment member has a
cylindrical outer surface defining an axis of rotation,
30 and wherein said orbital adjustment member is rotatable about said axis between said first position and said second position.

35 10. The reciprocating saw as set forth in Claim 9 wherein said spindle reciprocates along a spindle axis, and wherein said axis of rotation of said orbital adjustment member is substantially parallel to said spindle axis.

11. The reciprocating saw as set forth in Claim 2 wherein said support member has a forward portion, and wherein said saw further comprises a spherical bearing assembly supported by said housing, said spherical bearing assembly slidably supporting said spindle for movement relative to said housing, said spherical bearing assembly supporting said forward portion of said support member so that said support member is pivotable relative to said housing.

12. The reciprocating saw as set forth in Claim 11 wherein said spherical bearing assembly includes a spherical sleeve supported between said housing and said forward portion of said support member, and a bearing member supported between said support member and said spindle.

13. The reciprocating saw as set forth in Claim 12 wherein the spherical sleeve is split spherical sleeve.

14. The reciprocating saw as set forth in Claim 1 wherein said cam member is removably supported on said drive shaft.

15. The reciprocating saw as set forth in Claim 1 wherein said wobble plate includes a drive arm having an end, wherein said spindle defines a bore for receiving said end of said drive arm, and wherein said spindle includes a wear compensating member positioned in said bore and engageable with said end of said drive arm.

16. The reciprocating saw as set forth in Claim 1 and further comprising:

a shoe for engaging a surface of a workpiece;

5 a shoe support member supporting said shoe, said shoe support member being movably supported by said housing, said shoe support member defining there along a plurality of teeth;

a locking member pivotally supported by said housing; and

10 a lever for pivoting said locking member between a locked position, in which said locking member engages said teeth so that said shoe support member is prevented from moving relative to said housing, and a release position, in which said locking member does not
15 engage said teeth so that said shoe support member is movable relative to said housing.

17. A reciprocating saw comprising:

a housing;

a motor supported by said housing, said motor including a drive shaft rotatable about a drive shaft axis;

a spindle movably supported within said housing, said spindle having a front end adapted to support a saw blade through a cutting stroke and a return stroke;

a drive member connected to drive shaft and to said spindle to reciprocally drive said spindle relative to said housing upon rotation of said drive shaft;

a shoe for engaging a surface of a workpiece;

a shoe support member supporting said shoe, said shoe support member being movably supported by said housing, said shoe support member defining therealong a plurality of teeth;

a locking member pivotally supported by said housing; and

a lever for pivoting said locking member between a locked position, in which said locking member engages said teeth so that said shoe support member is prevented from moving relative to said housing, and a release position, in which said locking member does not engage said teeth so that said shoe support member is movable relative to said housing.

18. The reciprocating saw as set forth in Claim 17 wherein said housing has an upper portion, a lower portion, and opposed side portions, and wherein said lever is operable from the lower portion of said housing.

19. The reciprocating saw as set forth in Claim 17 wherein, during operation of said saw to cut the workpiece, an operator normally engages said lever so that said locking member is maintained in the locked position.

20. The reciprocating saw as set forth in Claim 17 and further comprising a retainer member supported by said housing and defining a channel, and wherein said shoe support member is movable in said channel.

21. The reciprocating saw as set forth in Claim 20 wherein said shoe support member has a bottom wall and at least one side wall extending from said bottom wall, and wherein said retainer member supports said shoe support member along said bottom wall and said side wall.

22. A drive assembly for a reciprocating saw including a housing and a motor supported by the housing, the motor including a drive shaft rotatable about a drive shaft axis, said drive assembly comprising:

5 a spindle movably supported within the housing, said spindle having a front end adapted to support a saw blade through a cutting stroke and a return stroke, said spindle defining a bore;

10 a wobble plate mounted on the drive shaft and connected to said spindle to reciprocally drive said spindle relative to the housing upon rotation of the drive shaft, said wobble plate including a drive arm having an end receivable in said bore; and

15 a wear compensating member positioned in said bore and engageable with said end of said drive arm.

23. The reciprocating saw as set forth in Claim 22 wherein said wear compensating member is a spring.

24. A reciprocating saw comprising:

a housing;

a motor supported by said housing, said motor including a drive shaft rotatable about a drive shaft axis;

a spindle movably supported within said housing, said spindle having a front end adapted to support a saw blade through a cutting stroke and a return stroke;

a drive member connected to said drive shaft and connected to said spindle to reciprocally drive said spindle along a spindle axis relative to said housing upon rotation of said drive shaft;

an orbital drive assembly connected to said spindle and operable to selectively drive the saw blade in an orbital path; and

an orbital adjustment assembly connected to said orbital drive assembly and operable to change the orbital path of the saw blade, said orbital adjustment assembly including an orbital adjustment member having a cylindrical outer surface defining an axis of rotation substantially parallel to said spindle axis, said orbital adjustment member being rotatable about said axis of rotation to change the orbital path of the saw blade.

25. A shoe assembly for a reciprocating saw, the saw including a housing and being adapted to drive a saw blade to cut a workpiece, said shoe assembly comprising:

5 a shoe for engaging a surface of the workpiece;

 a shoe support member supporting said shoe, said shoe support member defining therealong a plurality of teeth, said shoe support member having a bottom wall and at least one side wall extending from the bottom wall;

10 a retainer member supported by the housing and defining a channel, said shoe support member being supported in said channel and movable relative to the housing, said retainer member supporting said shoe support member along said bottom wall and said side wall;

15 a locking member pivotally supported by the housing; and

20 a lever for pivoting said locking member between a locked position, in which said locking member engages said teeth so that said shoe support member is prevented from moving relative to the housing, and a release position, in which said locking member does not engage said teeth so that said shoe support member is movable relative to the housing.

25



Application No: GB 9916984.9
Claims searched: 1 to 15

Examiner: Steve Wintersgill
Date of search: 16 November 1999

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.Q): B5L (LDS, LDX)

Int Cl (Ed.6): B23D 49/16; B27B 19/02, 19/04

Other: Online: WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
Y	US 5,566,458 (BEDNAR) see column 2 lines 1 to 7.	1.
Y	US 4,628,605 (CLOWERS) see column 2 lines 9 to 58.	1.

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.